

FP-108CX/DC


162 x 150 x 38 mm URANUS

DESIGN FEATURES


- * **Bearing System:**
Sleeve bearing & ball bearing
- * **Impeller:**
Plastic with fiber glass filed UL 94V-0
- * **Housing:**
Die cast aluminum painted black or natural color
- * **Motor:**
Brushless DC
- * **Connecting:**
Wire leads
- * **Speed:**
S-1 high speed type
S-2 medium speed type
- * Available FG Type for Speed Sensor Signal
- * Available RD Type for Rotor Locked Alarm Signal



Dimensions: mm

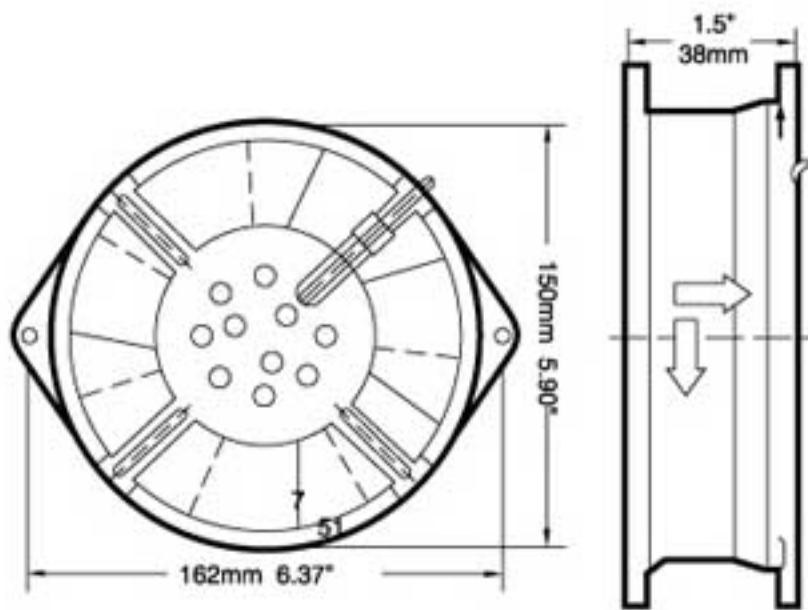

Performance

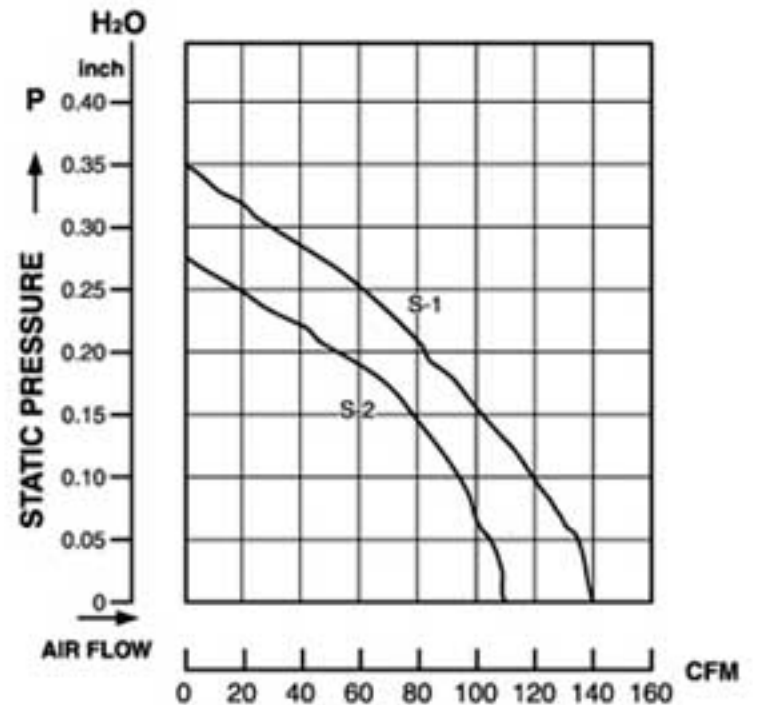

Specifications

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108CX/DC	12	140	4.00	0.75	9.0	2200	0.35	42
(S-1)	24	140	4.00	0.40	9.60	2200	0.35	42
	48	140	4.00	0.23	11.04	2200	0.35	42
FP-108CX/DC	12	110	3.12	0.55	6.60	1800	0.28	38
(S-2)	24	110	3.12	0.35	8.40	1800	0.28	38
	48	110	3.12	0.19	9.12	1800	0.28	38