

FP-108CX


162 x 150 x 38 mm

DESIGN FEATURES


- * **Bearing System:**
Ball bearing
- * **Impeller:**
Plastic with fiber glass filed UL 94V-0
- * **Housing:**
Die cast aluminium painted black or natural color
- * **Motor:**
Shaded pole, impedance protected
- * **Connecting:**
Wire leads
- * **Speed:**
S-1 high speed type
- * **Other Voltage:**
24, 48, 100, 380AC, (50-60Hz) are available



Dimensions: mm

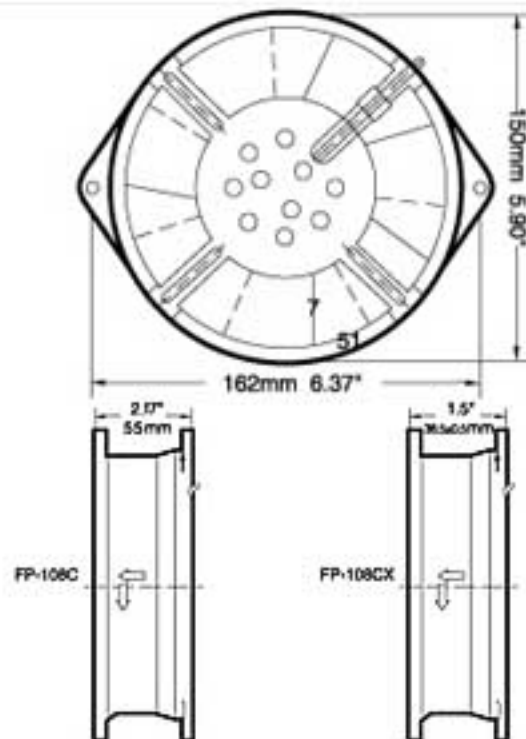

Performance

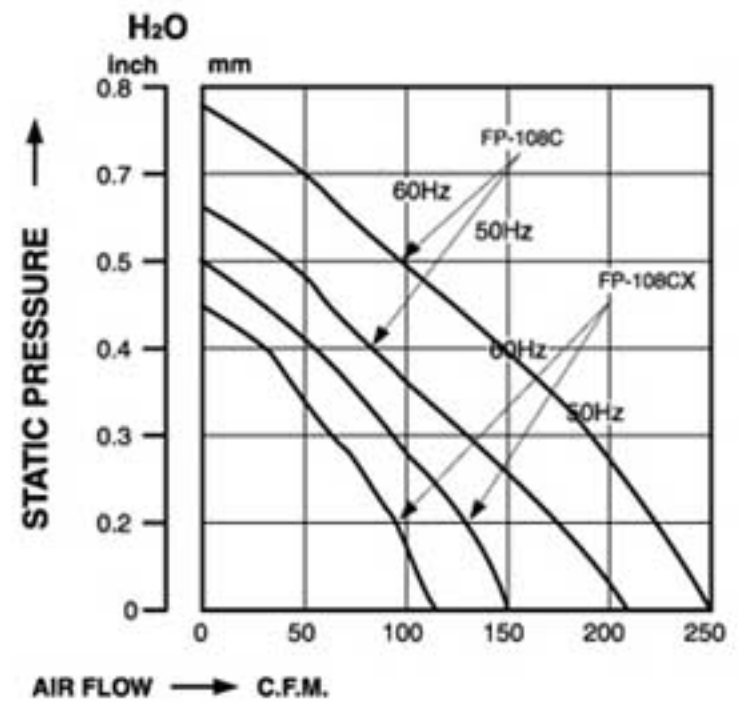

Specification

| MODEL NO. | VOLT (VAC) | FREQUENCY (HZ) | AIR (CFM) | VOLUME (M ³ /MIN) | CURRENT (A) | POWER (W) | SPEED (RPM) | STATIC PRESSURE (INCH-H ₂ O) | NOISE (dBA) |
|-----------|------------|----------------|-----------|------------------------------|-------------|-----------|-------------|---|-------------|
| FP-108C | 110/120 | 50/60 | 210/250 | 5.9/7.00 | 0.5/0.45 | 38/35 | 2700/3000 | 0.63/0.79 | 51/54 |
| | 220/240 | 50/60 | 210/250 | 5.9/7.00 | 0.5/0.45 | 32/31 | 2700/3000 | 0.63/0.79 | 51/54 |
| FP108CX | 110/120 | 50/60 | 140/130 | 4.0/3.7 | 0.30/0.27 | 22/20 | 2300/2000 | 0.38/0.36 | 31/30 |
| | 220/240 | 50/60 | 140/130 | 4.0/3.7 | 0.18/0.16 | 27/24 | 2300/2000 | 0.38/0.36 | 31/30 |