

FP-108EXM


172 x 150 x 38 mm

DESIGN FEATURES


- * **Bearing System:**
Ball bearing
- * **Impeller:**
Plastic with fiber glass filed UL 94V-0
- * **Housing:**
Die cast aluminium painted black or natural color
- * **Motor:**
Shaded pole motor
- * **Connecting:**
Wire leads & terminal
- * **Protection:**
Thermal protection & impedance protection
- * **Other Voltage:**
24, 48, 100, 380AC, (50-60Hz) are available



Dimensions: mm

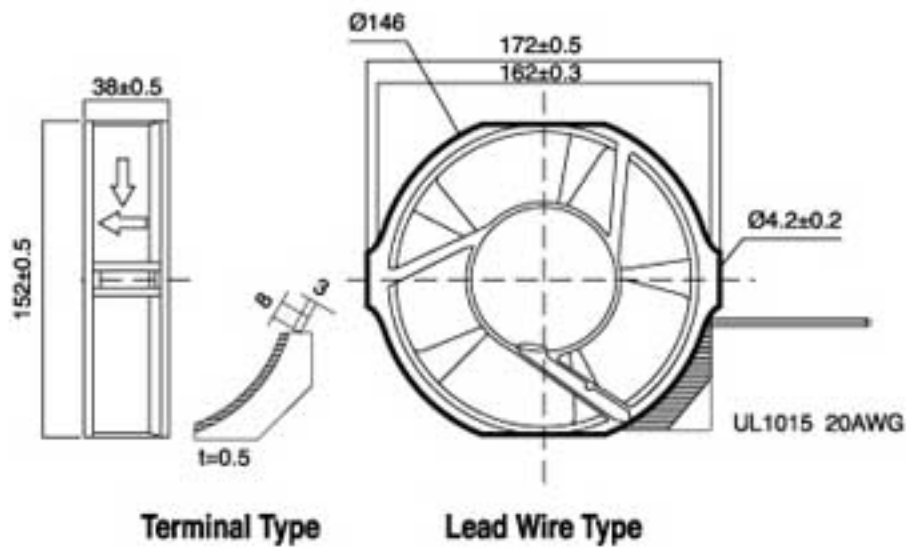

Performance

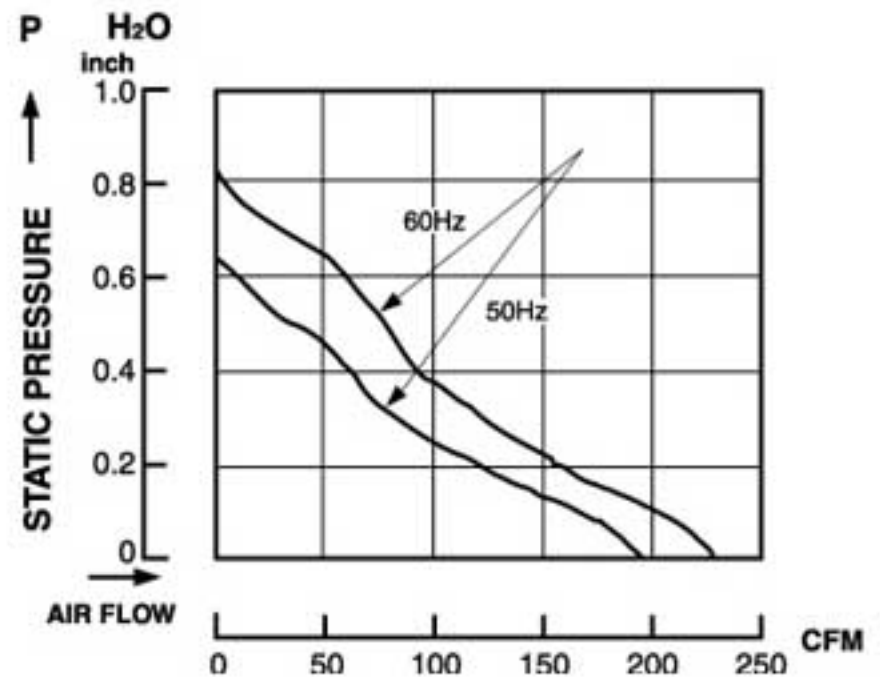

Specification

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108EXM	110/120	50/60	205/230	5.80/6.50	0.40/0.40	30/28	2700/2900	0.75/0.60	49
FP-108EXM	220/240	50/60	205/230	5.80/6.50	0.28/0.23	38/35	2700/2900	0.75/0.60	49