

FP-108-F/DC


60 x 60 x 25.4 mm Ultra

DESIGN FEATURES


- * **Bearing System:**
Ball bearing & sleeve bearing
- * **Impeller:**
Plastic with fiber glass filed UL 94V-0
- * **Housing:**
Plastic with fiber glass filed UL 94V-0
- * **Motor:**
Brushless DC
- * **Connecting:**
Wire leads
- * **Speed:**
S-1 high speed type
S-2 medium speed type
S-2 medium speed type
- * Available FG Type for Speed Sensor Signal
- * Available RD Type for Rotor Locked Alarm Signal



Dimensions: mm

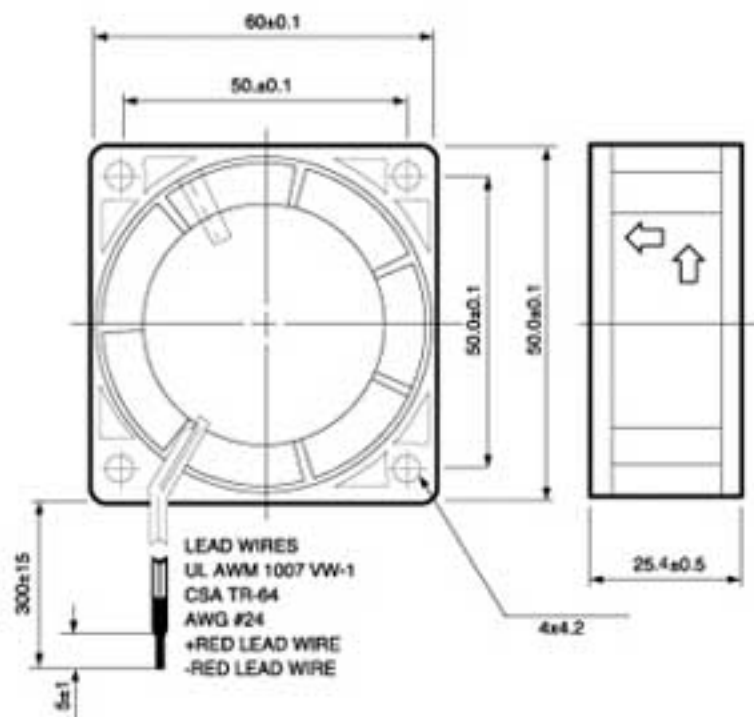

Performance

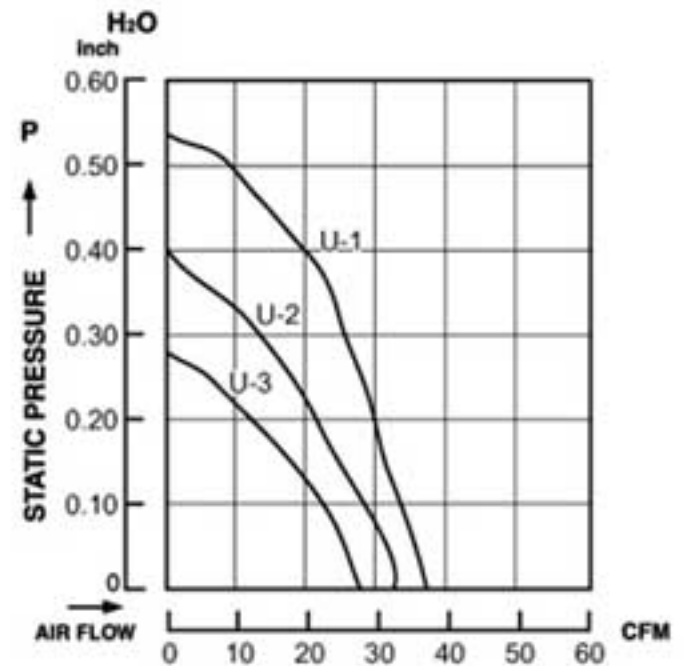

Specifications

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108F/DC (U-1)	12	38.5	1.10	0.39	4.68	7000	0.53	46
	24	38.5	1.10	0.22	5.28	7000	0.53	46
FP-108F/DC (U-2)	12	33.0	0.93	0.34	4.08	6000	0.40	42
	24	33.0	0.93	0.18	4.32	6000	0.40	42
FP-108F/DC (U-3)	12	28.0	0.80	0.23	2.76	5000	0.29	37
	24	28.0	0.80	0.13	3.12	5000	0.29	37