

# FP-108-FX/DC


60 x 60 x 20 mm

## DESIGN FEATURES


- \* **Bearing System:**  
Sleeve bearing & ball bearing
- \* **Impeller:**  
Plastic with fiber glass filed UL 94V-0
- \* **Housing:**  
Plastic with fiber glass filed UL 94V-0
- \* **Motor:**  
Brushless DC
- \* **Connecting:**  
Wire leads
- \* **Speed:**  
S-1 high speed type  
S-2 medium speed type
- \* Available FG Type for Speed Sensor Signal



Dimensions: mm

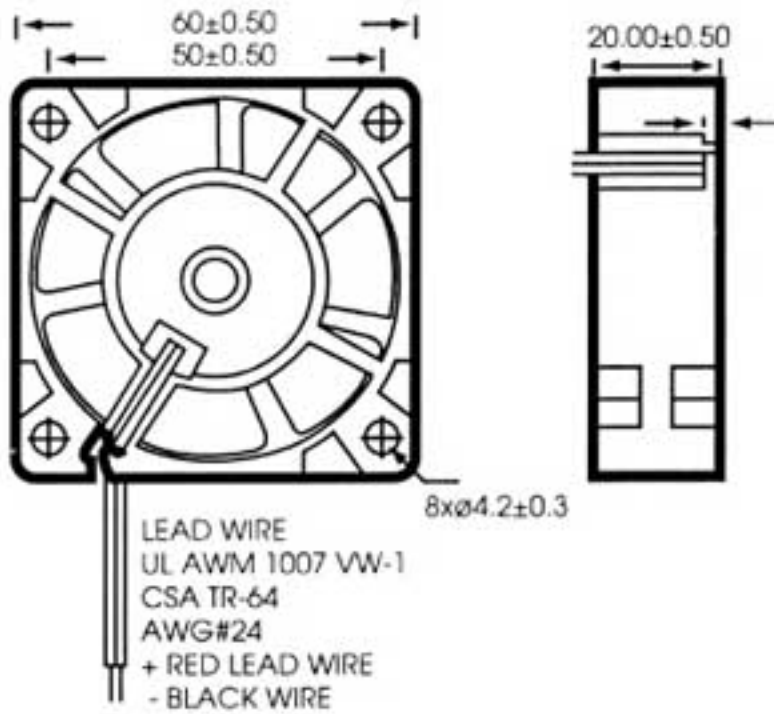

Performance

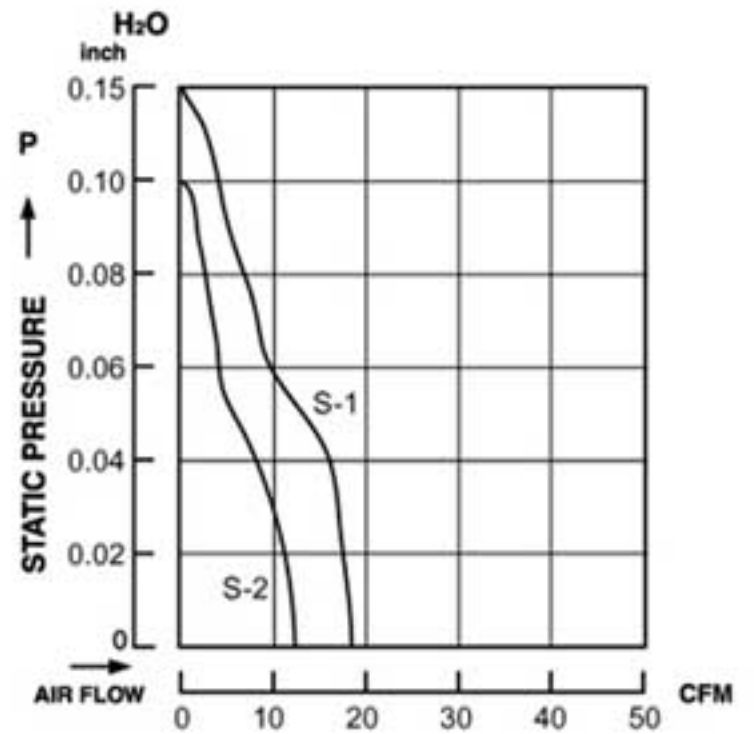

## Specifications

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M <sup>3</sup> /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H <sub>2</sub> O)	NOISE (dBA)
FP-108FX/DC	12	18	0.50	0.15	1.80	4300	0.15	30
(S-1)	24	18	0.50	0.10	2.40	4300	0.15	30
FP-108FX/DC	12	13	0.37	0.13	1.56	3500	0.10	27
(S-2)	24	13	0.37	0.08	1.92	3500	0.10	27