

FP-108-HX/DC


40 x 40 x 10 mm

DESIGN FEATURES


- * Bearing System:
Ball bearing & Sleeve bearing
- * Impeller:
Plastic with fiber glass filed UL 94V-0
- * Housing:
Plastic with fiber glass filed UL 94V-0
- * Motor:
Brushless DC
- * Connecting:
Wire leads
- * Speed:
S-1 high speed type
S-2 medium speed type
- * Available FG Type for Speed Sensor Signal



Dimensions: mm

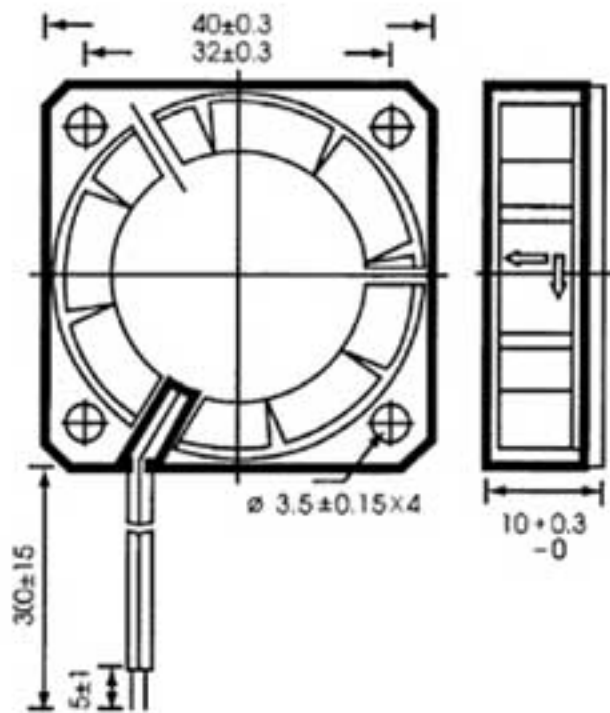

Performance

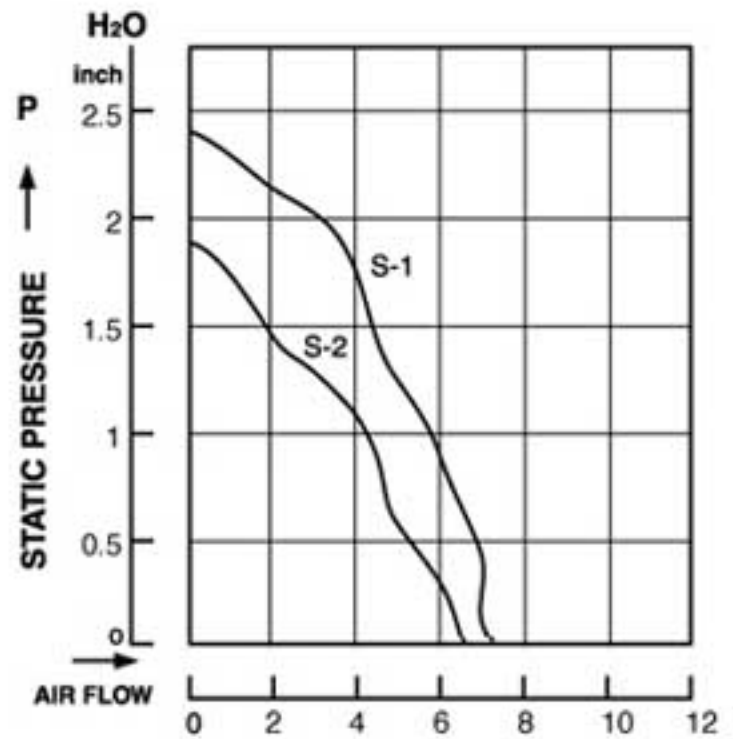

Specifications

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108HX/DC	5	7.70	0.22	0.23	1.15	6500	2.40	28
(S-1)	12	7.70	0.22	0.13	1.56	6500	2.40	28
FP-108HX/DC	5	6.50	0.18	0.18	0.90	5000	1.90	24
(S-2)	12	6.50	0.18	0.09	1.08	5000	1.90	24