

# FP-108-JT/DC


50 x 50 x 15 mm

## DESIGN FEATURES


- \* **Bearing System:**  
Sleeve & ball bearing
- \* **Impeller:**  
Plastic with fiber glass filed UL 94V-0
- \* **Housing:**  
Plastic with fiber glass filed UL 94V-0
- \* **Motor:**  
Brushless DC
- \* **Connecting:**  
Wire leads
- \* **Speed:**  
S-1 high speed type  
S-2 medium speed type  
S-3 low speed type
- \* Available FG Type for Speed Sensor Signal



Dimensions: mm

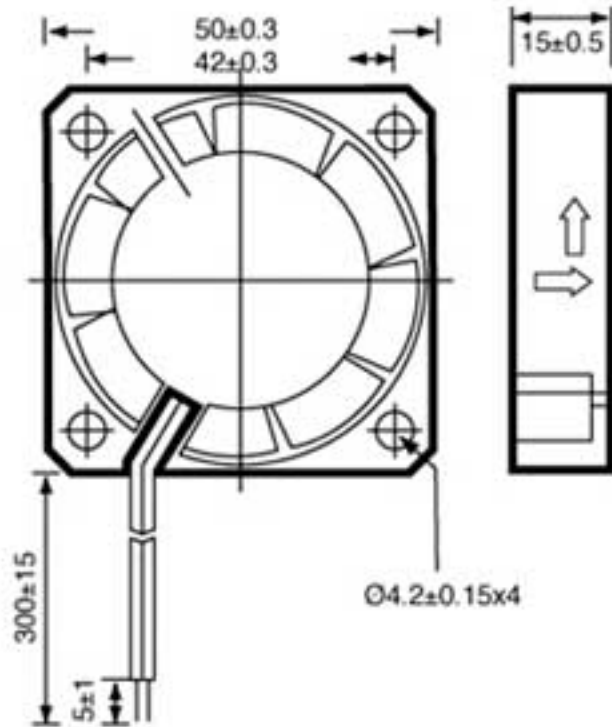

Performance

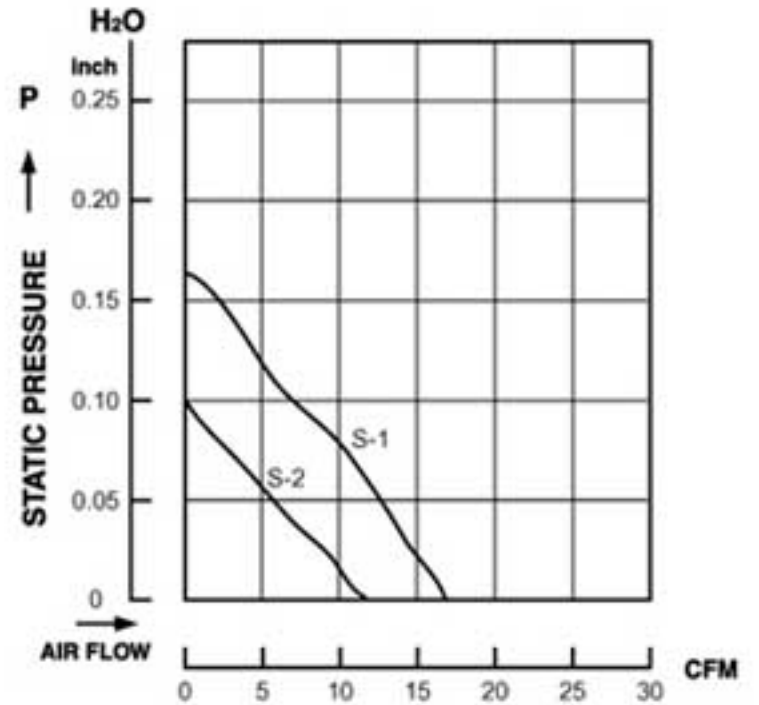

## Specifications

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M <sup>3</sup> /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H <sub>2</sub> O)	NOISE (dBA)
FP-108JT/DC(S-1)	12	16.60	0.70	0.19	2.28	5500	0.17	33
FP-108JT/DC(S-2)	12	12.70	0.36	0.15	1.80	4500	0.10	28