

FP-108-P/DC


35 x 35 x 10 mm

DESIGN FEATURES


- * Bearing System:
Sleeve bearing & ball bearing
- * Impeller:
Plastic with fiber glass filed UL 94V-0
- * Housing:
Plastic with fiber glass filed UL 94V-0
- * Motor:
Brushless DC
- * Connecting:
Wire leads
- * Speed:
S-1 high speed type
S-2 medium speed type
- * Available FG Type for Speed Sensor Signal



Dimensions: mm

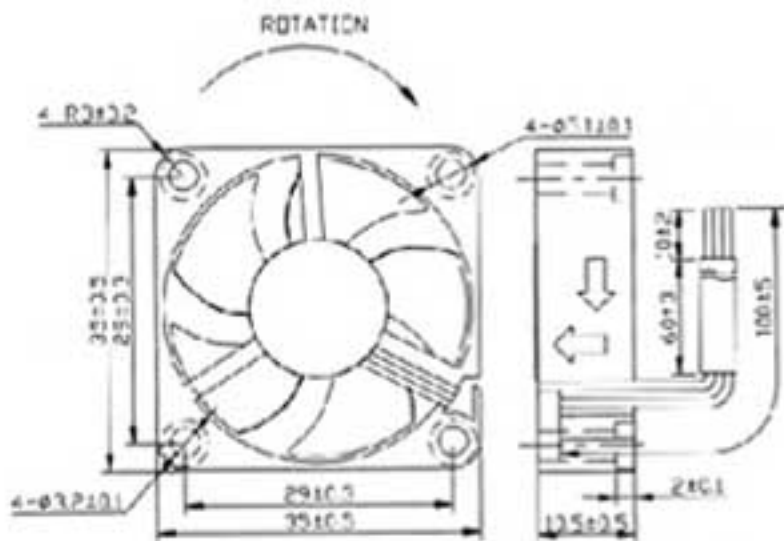

Performance

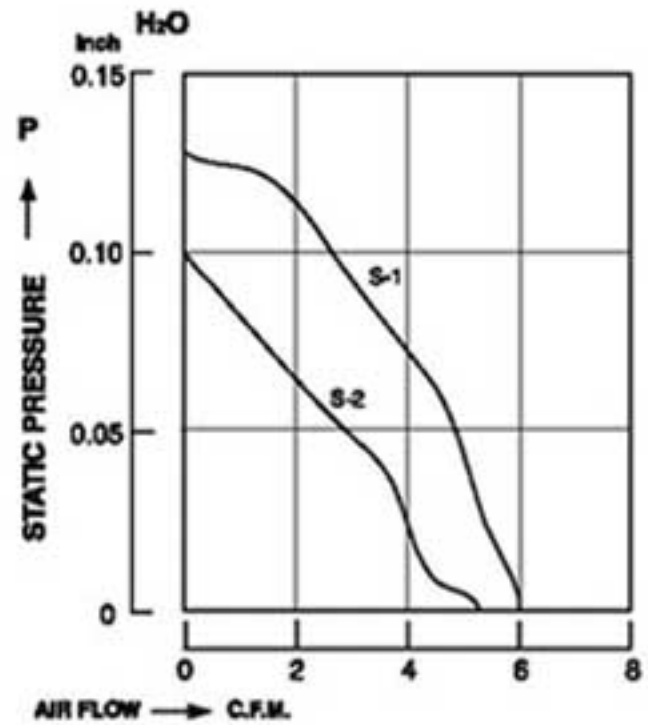

Specification

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108P/DC	5	6	0.16	0.17	0.85	8000	0.13	30
(S-1)	12	6	0.16	0.09	1.08	8000	0.13	30
FP-108P/DC	5	5.10	0.14	0.12	0.6	7000	0.10	27.5
(S-2)	12	5.10	0.14	0.08	0.96	7000	0.10	27.5