

FP-108-RX/DC


70 x 70 x 25 mm

DESIGN FEATURES


- * **Bearing System:**
Ball bearing & sleeve bearing
- * **Impeller:**
Plastic with fiber glass filed UL 94V-0
- * **Housing:**
Plastic with fiber glass filed UL 94V-0
- * **Motor:**
Brushless DC
- * **Connecting:**
Wire leads
- * **Speed:**
S-1 high speed type
S-2 medium speed type
S-3 medium speed type
- * Available FG Type for Speed Sensor Signal
- * Available RD Type for Rotor Locked Alarm Signal



Dimensions: mm

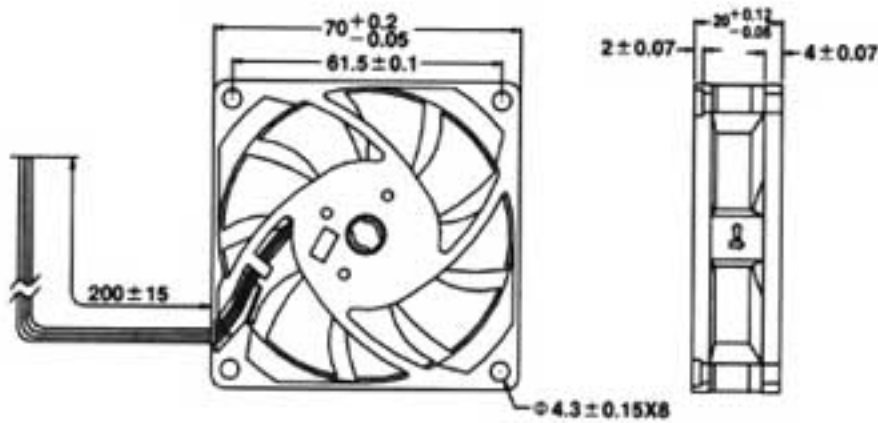

Performance

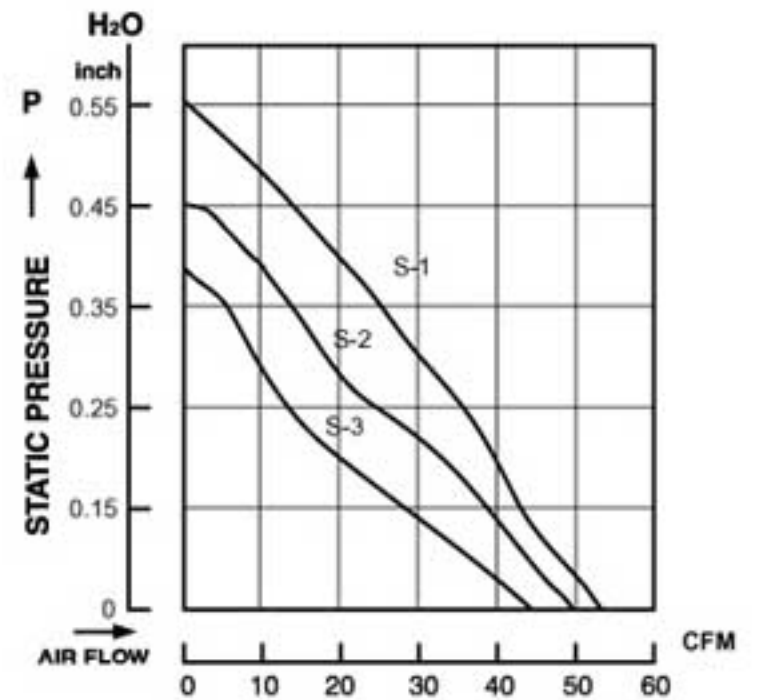

Specifications

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108RX/DC (S-1)	12	54.0	1.53	0.62	7.44	6000	0.55	47
FP-108RX/DC (S-2)	12	50.0	1.40	0.52	6.24	5500	0.45	45
FP-108RX/DC (S-3)	12	45.3	1.28	0.33	3.96	5000	0.39	42