

# FP-108-S/DC


30 x 30 x 10 mm

## DESIGN FEATURES


- \* **Bearing System:**  
Ball bearing & sleeve bearing
- \* **Impeller:**  
Plastic with fiber glass filed UL 94V-0
- \* **Housing:**  
Plastic with fiber glass filed UL 94V-0
- \* **Motor:**  
Brushless DC
- \* **Connecting:**  
Wire leads
- \* **Available FG Type for Speed Sensor Signal**



Dimensions: mm

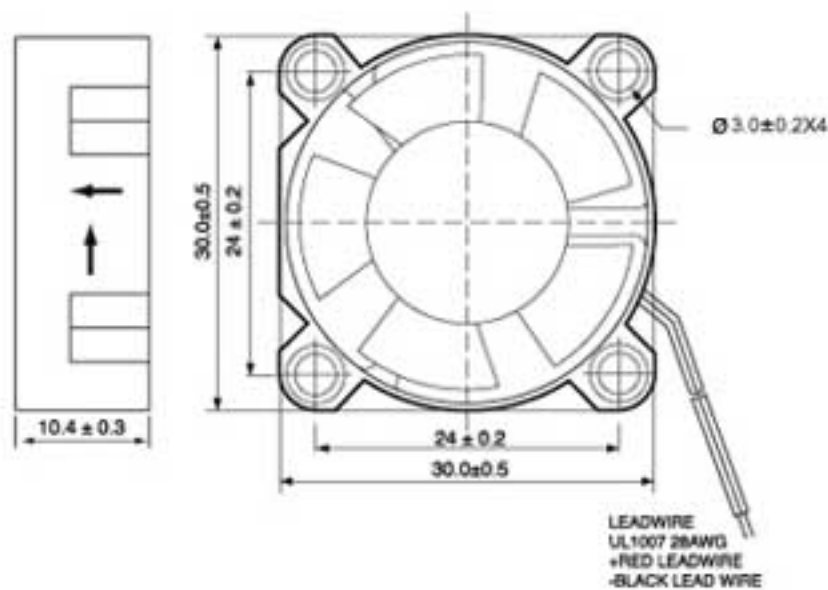

Performance

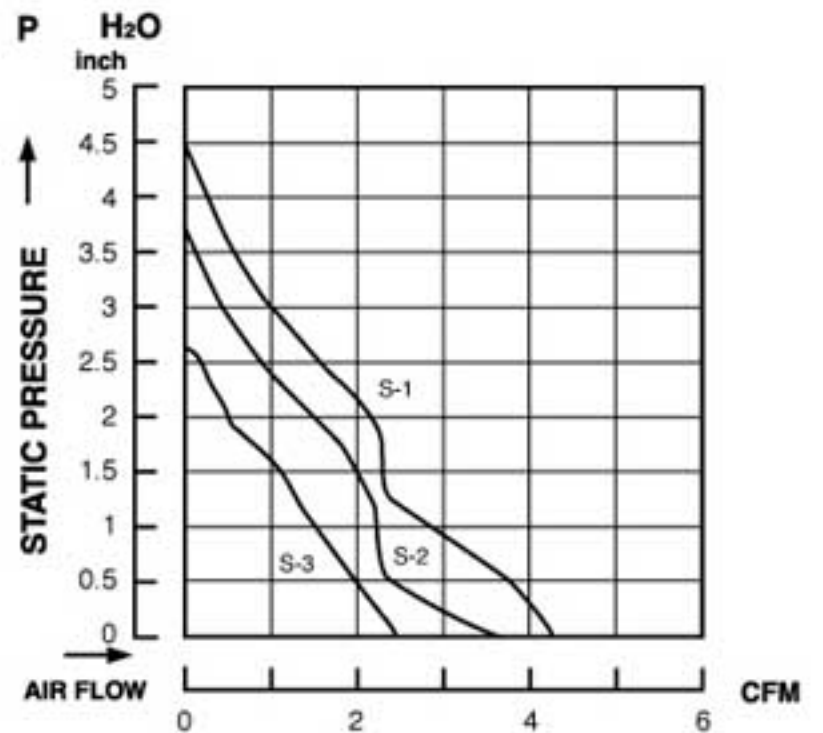

## Specification

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M <sup>3</sup> /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H <sub>2</sub> O)	NOISE (dBA)
FP-108ST/DC	5	3.90	0.11	0.20	1.00	8000	3.60	26
(S-1)	12	3.90	0.11	0.12	1.44	8000	3.60	26
FP-108ST/DC	5	3.10	0.088	0.12	0.60	6000	2.80	20
(S-2)	12	3.10	0.088	0.10	1.20	6000	2.80	20