

CIC-100DC


97 x 94 x 33 mm BLOWER

DESIGN FEATURES


- * **Bearing System:**
Ball bearing & sleeve bearing
- * **Impeller:**
Plastic with fiber glass filed UL 94V-0
- * **Housing:**
Plastic with fiber glass filed UL 94V-0
- * **Motor:**
Brushless DC
- * **Connecting:**
Wire leads
- * Available FG type for speed sensor signal



Dimensions: mm

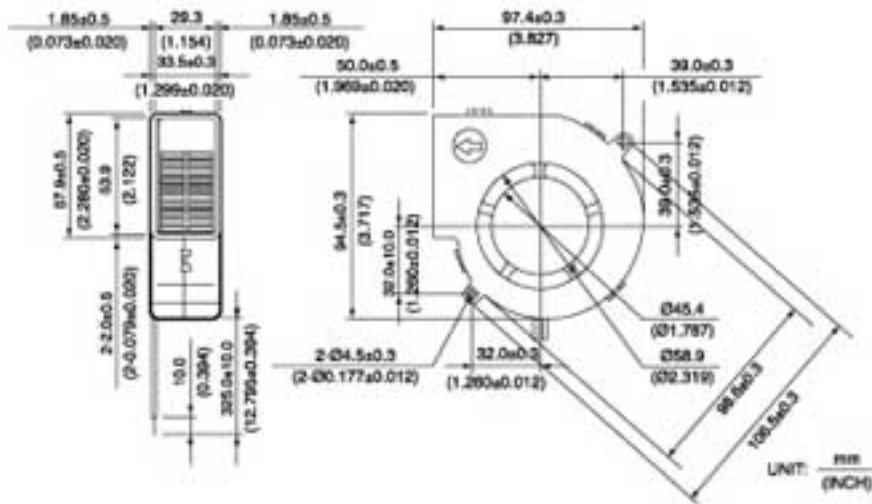

Performance

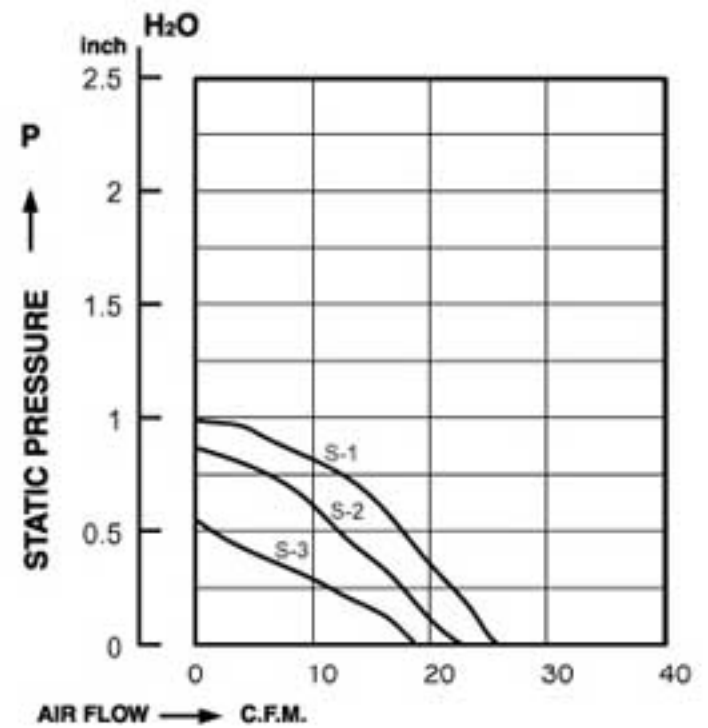

Specifications

MODEL NO.	VOLTAGE (VDC)	AIR VOLUME (CFM)	(M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
CIC-100	12	26	0.74	0.86	10.32	3600	1.00	51
(S-1)	24	26	0.74	0.60	14.40	3600	1.00	51
CIC-100	12	23	0.65	0.64	7.68	3200	0.75	48
(S-2)	24	23	0.65	0.40	9.60	3200	0.75	48
CIC-100	12	19	0.54	0.48	5.76	2600	0.52	44
(S-3)	24	19	0.54	0.15	3.60	2600	0.52	44